

LUMIBRIGHT

inspired by light

CURVED MAGNETO

MAGNETIC MODULAR LIGHT SYSTEM

• QUICK BOOK •



Lumibright's Curved magneto track is a minimalistic track lighting solution that connects and powers its LED heads via a magnetic core. The design of the 24-volt system not only ensures a reliable and safe connection between each fixture to the track but also allows for ease in the relocation of each at any time. This magnetic track is available in custom RAL colours, gold and bronze finishes as well as the original black and white options.



www.lumibright.co.uk















MAGNETIC

PLUG & PLAY

DIMMABLE

LUMIBRIGHT
inspired by light





SUSPENDED
CURVED MAGNETIC SYSTEM

RECESSED
CURVED MAGNETIC SYSTEM





SURFACE
CURVED MAGNETIC SYSTEM

Curved Magnetic Systems make life simple,

With The Brand New Track Systems,
The Curved Magnetic Systems
Brings You More Inspirations.



Full 1/2 1/4 1/8 Creative design



Creative design Creative design

LUMIBRIGHT™
inspired by light

The best gift for the invisible lighting principle.
Lighting that is both comfortable and non-glaring




LB3731

POWER : 4W
INPUT : 24VDC
CRI : >80 >90
OUTPUT : 380lm
BEAM : 12°,34°,48°
DIMENSION : 99x39x56mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | IP20

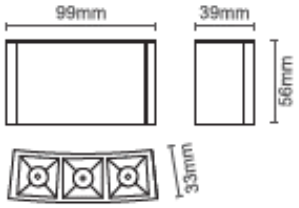




LB3732

POWER : 8W
INPUT : 24VDC
CRI : >80,>90
OUTPUT : 500lm
BEAM : Diffused
DIMENSION : 190.6x42x56mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | IP20

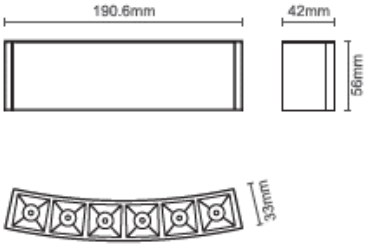




LB3733

POWER : 7W
INPUT : 24VDC
CRI : >80,>90
OUTPUT : 500lm
BEAM : Diffused
DIMENSION : 190.6x42x56mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | IP20

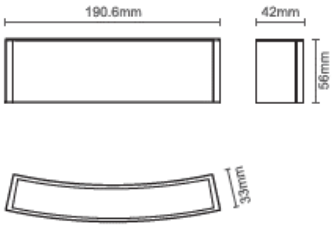

LUMIBRIGHT™
inspired by light

Refractive or half-breed optical gadgets create 3 wonderful pillar factors for every spotlight. To keep away from restricted tune suspension range varieties, an intersection arm is constant into the brilliant lighting fixtures part to maintain the barycenter coated up with the tune.

DC24V INPUT | DIMMABLE | CE | RoHS | ETL | IP20 | DALI




LB3734

POWER : 5W
INPUT : 24VDC
CRI : >80,>90
OUTPUT : 440lm
BEAM : 20°,30°,40°,60°
DIMENSION : Ø35x80mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

WWH | WBK | CE IP20

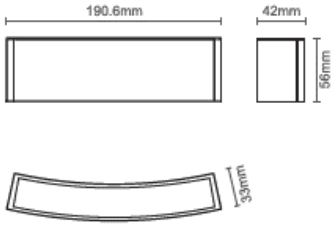

LB3735




POWER : 15W
INPUT : 48VDC
CRI : >90
OUTPUT : 1200lm
BEAM : 15°/30°/45°
DIMENSION : 245x111x20mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | WGL | CE IP20

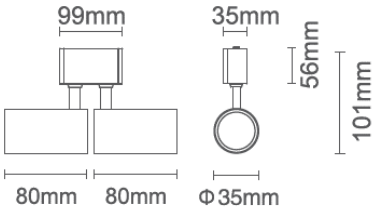

LB3736




POWER : 10W
INPUT : 24VDC
CRI : >80,>90
OUTPUT : 780lm
BEAM : 18°,24°,36°
DIMENSION : Ø50x140mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | WGL | CE IP20

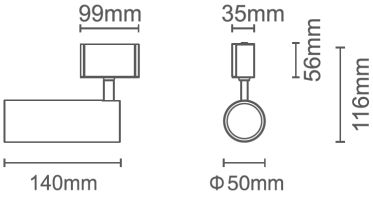

DC24V INPUT | DIMMABLE | CE | RoHS | ETL | IP20 | DALI

LUMIBRIGHT™
inspired by light

Refractive or half-breed optical gadgets create 3 wonderful pillar factors for every spotlight. To keep away from restricted tune suspension range varieties, an intersection arm is constant into the brilliant lighting fixtures part to maintain the barycenter coated up with the tune.

DC24V INPUT | DIMMABLE | CE | RoHS | ETL Intertek | IP20 | DALI




LB3737

POWER : 8W
INPUT : 24VDC
CRI : >80,>90
OUTPUT : 405lm
BEAM : 15°/30°/45°
DIMENSION : Ø65x112mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | CE IP20

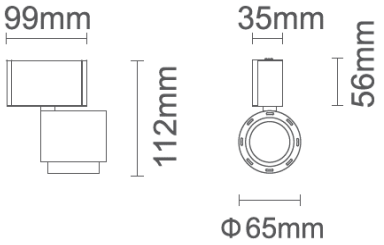




LB3738

POWER : 15W
INPUT : 24VDC
CRI : >80 >90
OUTPUT : 905lm
BEAM : 10°,20°,30°
DIMENSION : Ø70x165mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | CE IP20

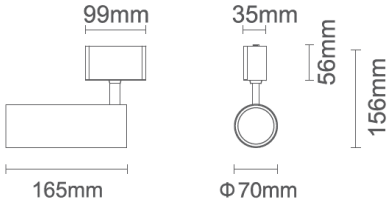




LB3739

POWER : 10W
INPUT : 24VDC
CRI : >80 >90
OUTPUT : 440lm
BEAM : 18°,24°,36°
DIMENSION : Ø50x250mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | WGL | CE IP20

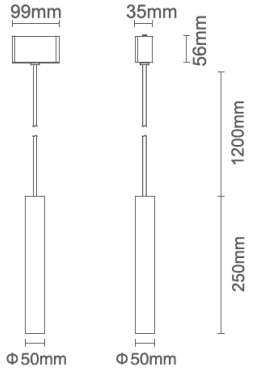

DC24V INPUT | DIMMABLE | CE | RoHS | ETL Intertek | IP20 | DALI

LUMIBRIGHT
inspired by light

Glare-free lighting, minimal glare, numerous light beams, and an elegant body coating and antiglare cover




LB3740

POWER : 5W
INPUT : 24VDC
CRI : >80,>90
OUTPUT : 780lm
BEAM : 18°,24°,36°
DIMENSION : Ø35x250mm

Materials : Aluminium

2700K WW | 3000K WW | 4000K NW | 5000K CW

PAW | PAB | WGL | IP20

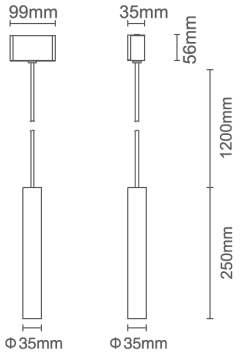




LB3741

POWER : 5W
INPUT : 24VDC
CRI : >80,>90
OUTPUT : 290lm
BEAM : Diffused
DIMENSION : Ø150x237mm

Materials : Aluminium


2700K WW | 3000K WW | 4000K NW | 5000K CW

WWH | WBK | IP20



DC24V INPUT | DIMMABLE | IP20 | DALI

LUMIBRIGHT™
inspired by light

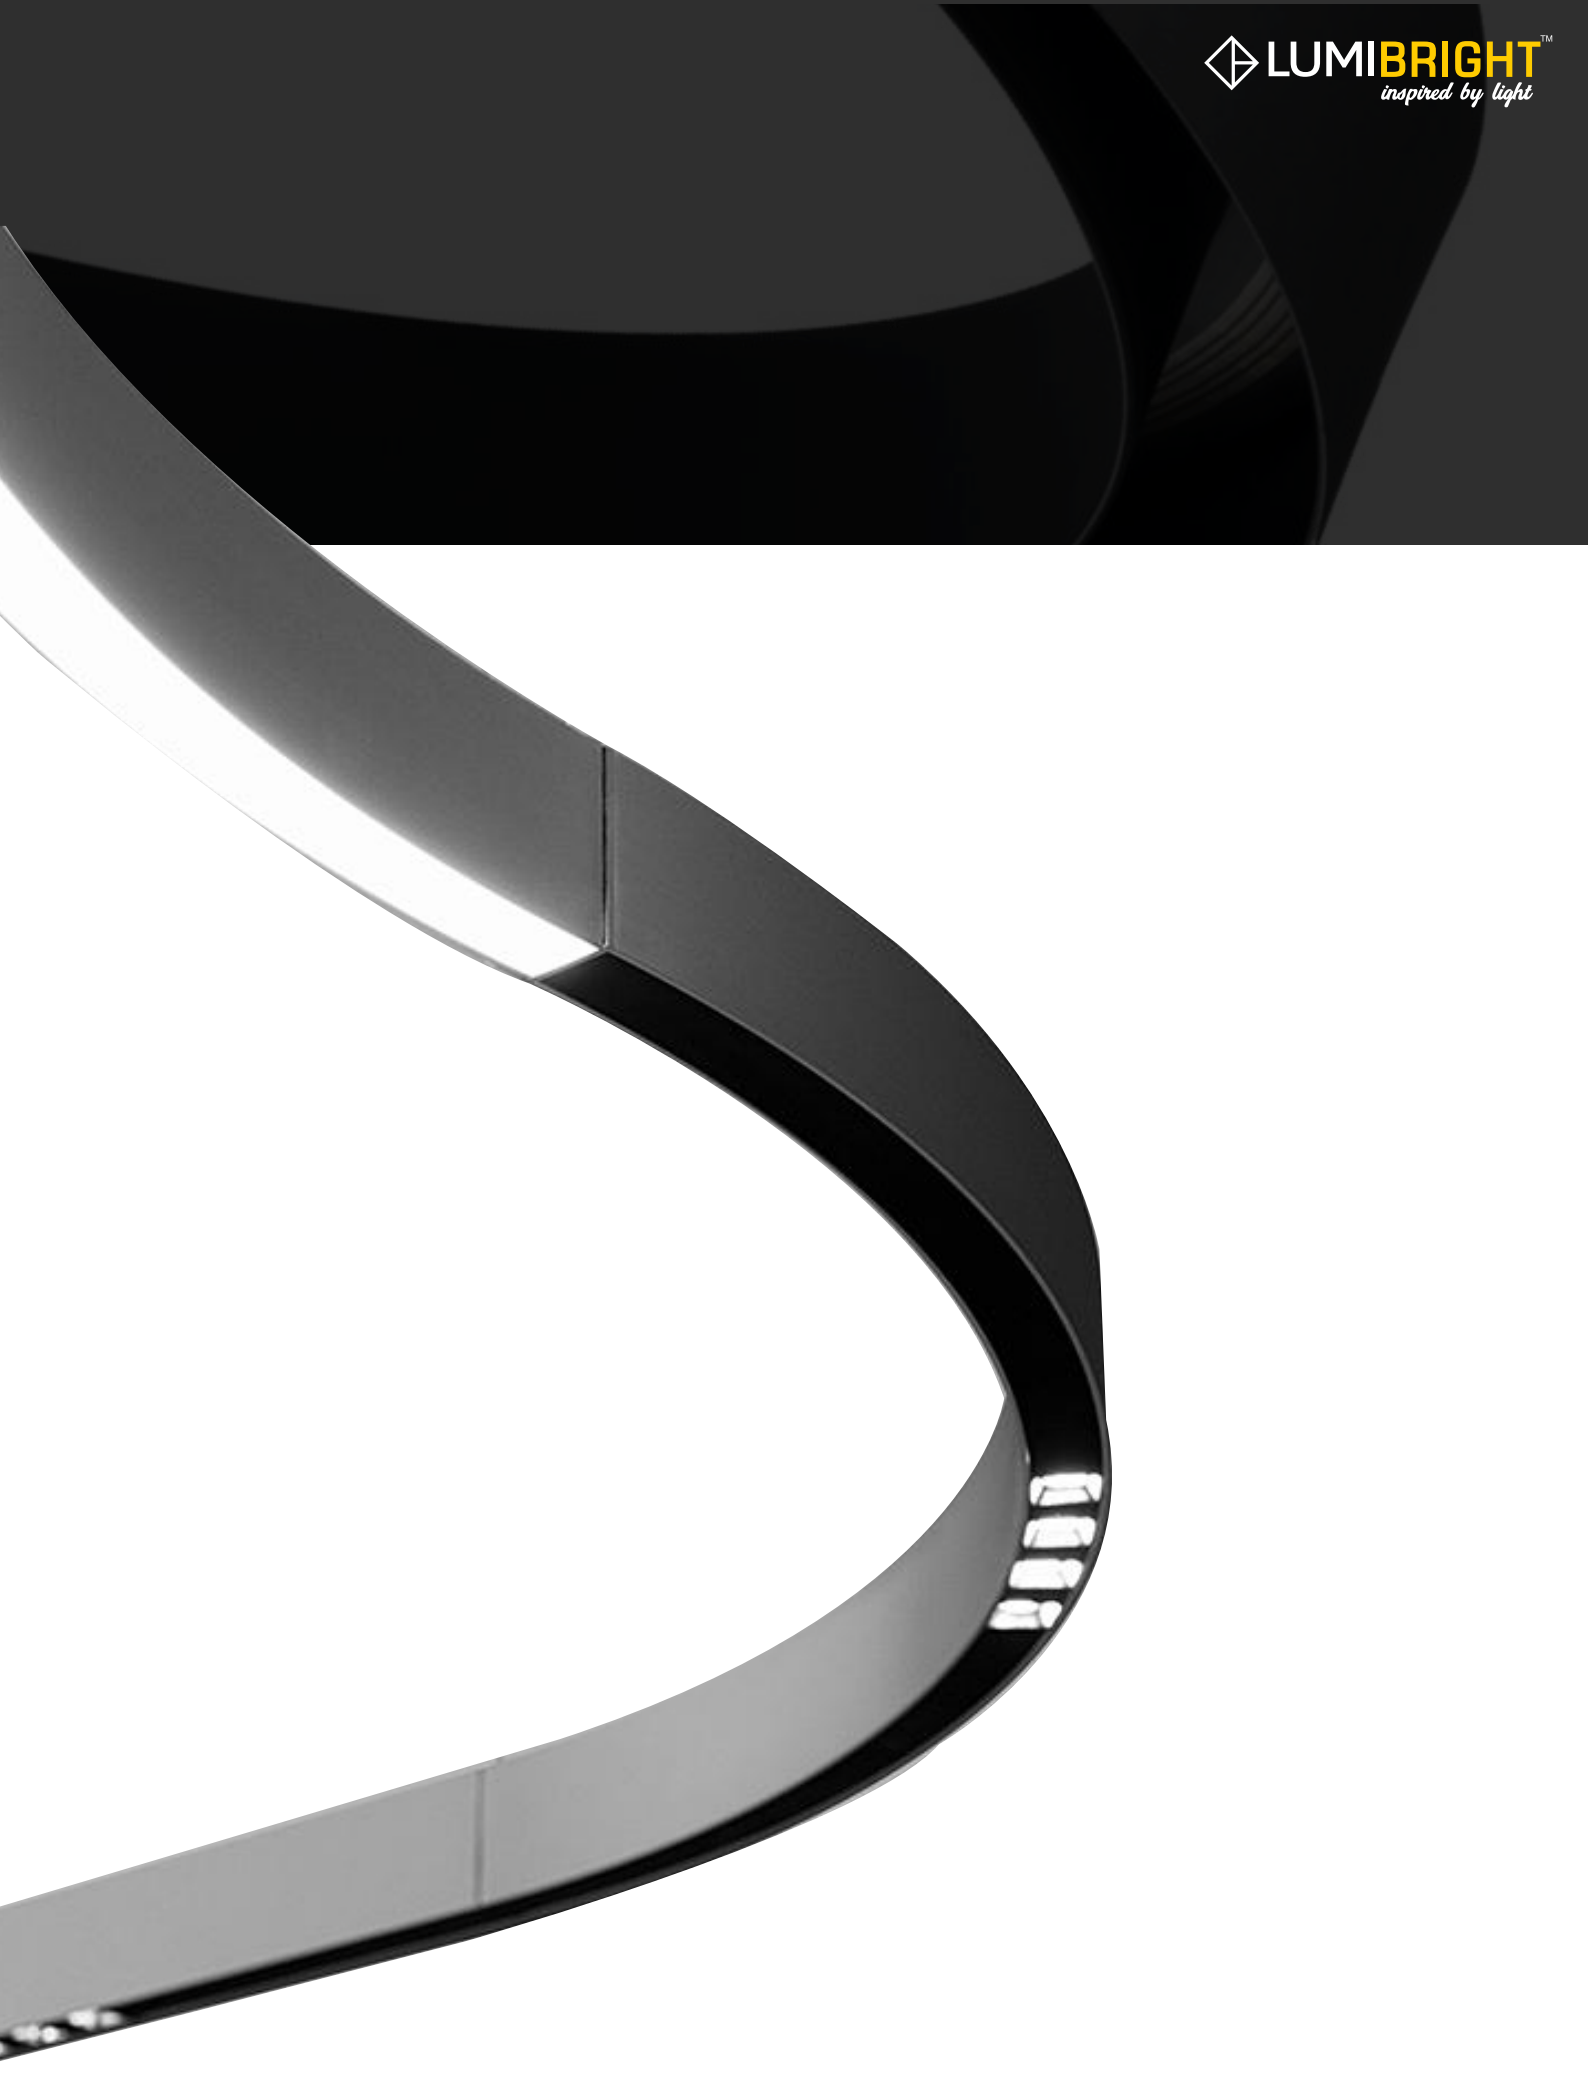


Accessories



LB0860

SIZE : Ø900x39x76mm
SPEC : Full Circle Track

PAW PAB WGL






LB0861

SIZE : Ø900x39x76mm
SPEC : 1/2 Curved Track

PAW PAB WGL






LB0862

SIZE : Ø900x39x76mm
SPEC : 1/4 Curved Track

PAW PAB WGL






LB0863

SIZE : Ø900x39x76mm
SPEC : Curved Corner Connector 1/8

PAW PAB WGL





LB0864

SIZE : Ø80mm
SPEC : Pendant mounting kit for full circle profile, includes 3 sets

PAW PAB WGL



LB0867

SPEC : Surface mounted Kits
(each set includes 4 pcs of each)

INSPIRED
IHG
HOLDING GROUP

HEADQUARTER

Phase 2 Building Davy Way
Llay,Wrexham,
Wales,LL12 OPG,UK
T: +44 (0) 844 202 2466

DUBAI OFFICE

IHG Brands Lighting LLC
LUMIBRIGHT LTD, Sheikh Zayed Road
Interchange No-3 , Dubai, UAE
T: +971 (0) 4 33 83 448

FOR ENQUIRIES : sales@lumibright.co.uk

www.lumibright.co.uk